



420 x 520 mm



350 x 450 mm

Plataforma monocélula | Plate-forme monocapteur | Bench platform

WT

**CARACTERÍSTICAS**

- > Plataforma monocélula.
- > Célula con certificado de ensayo OIML R-60 C3.

> Dos versiones diferentes:

1. Versión (P): 350x450 mm. Estructura tubular en acero, plato en acero inoxidable y célula en aluminio, IP65.
2. Versión (M): 420x520 mm. Estructura en aluminio inyectado, plato en acero inoxidable y célula en aluminio, IP65.

CARACTÉRISTIQUES

- > Plate-forme mono-capteur.
- > Capteur avec certificat d'essais OIML R-60 C3.

> Deux versions différentes:


1. Version (P): 350x450 mm. Structure tubulaire en acier, plateau en acier inoxydable et capteur en aluminium, IP65.
2. Version (M): 420x520 mm. Structure en aluminium injecté, plateau en acier inoxydable et capteur en aluminium, IP65.

FEATURES

- > Bench platform.
- > Load cell with prof. certify OIML R-60 C3.

> Two different versions:

1. Version (P): 350x450 mm. Tubular framework in steel, sheet in stainless steel and aluminium load cell, IP65.
2. Version (M): 420x520 mm. Structure in die casting aluminium, sheet in stainless steel and aluminium load cell, IP65.

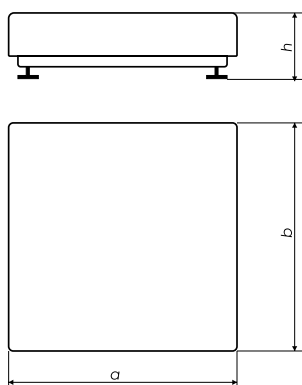

a	b	h (max)	h (min)
350	450	145	130
420	520	145	130

Referencias Références References							
Ref.	WT30P	WT60P	WT150P	WT60M	WT150M	WT300M	
Capacidad Portée Capacity (kg)	30	60	150	60	150	300	
Fracción Précision Fraction (g)	10	20	50	20	50	100	
Dimensiones plato Dimensions du plateau Pan dimensions (mm)	350x450			420x520			
Dimensiones embalaje Dimensions emballage Packing dimensions (mm)	830x500x175			910x560x185			
Peso embalaje Poids emballage Packing weight (kg)	12			15			



CI2

Accesorios | Accessoires | Accessories

Ref. Descripción de accesorios | Description des accessoires | Description equipment

CI2 Columna inoxidable (600 mm) con pie pintado | Colonne inoxydable (600 mm) avec pied peint | Stainless steel column (600 mm) with painted fixation base.